


Roberts' Revival R250 Radio.

Replacing the batteries in the battery box.

1. Place the radio, speaker grille downwards, on a soft surface and open the rear door.
2. Withdraw the battery box from the radio, using the battery connector if required.
3. To prevent any damage, detach the battery connector from the battery box and then remove the exhausted batteries.
4. Refit 6 x LR14 ('C' size) batteries into the battery box taking care to ensure that each battery is inserted with the correct polarity as shown on the insides of the battery box.
5. Refit the battery connector to the battery box, taking care to ensure that the lead runs along the top of the battery box in the direction of the rear door hinge (see diagram below).
6. Place the battery box back into the radio, taking care to ensure that the battery connector is located at the opposite side to the hinge of the rear door (see diagram below).
7. Finally, close and secure the rear door.

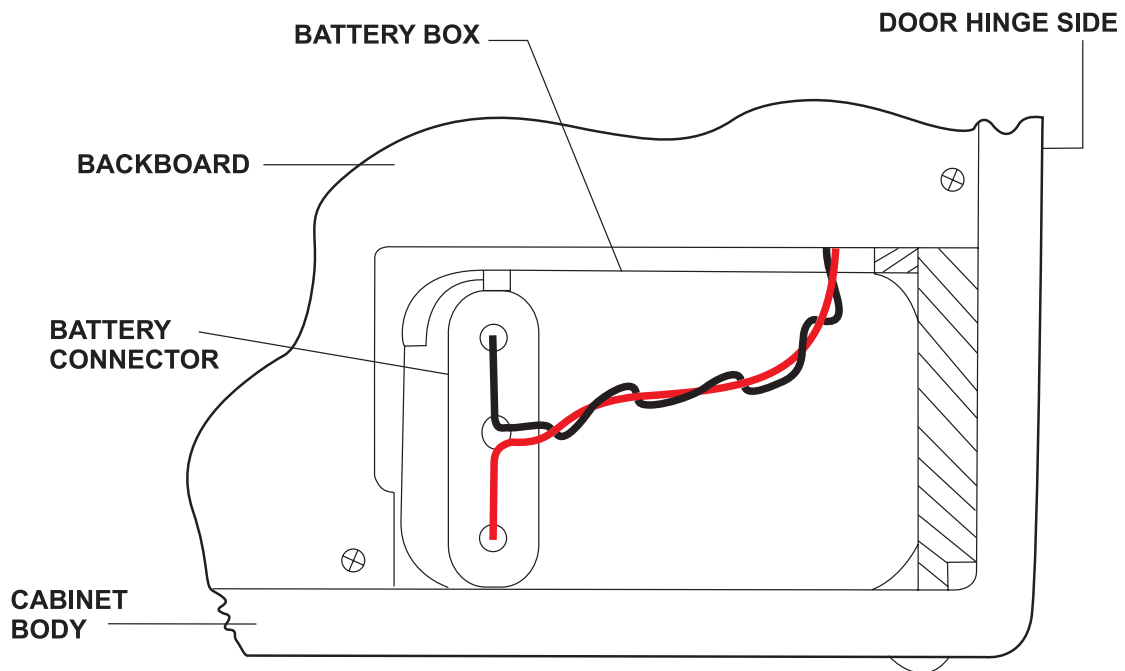

SCALE 1:1